



The strong sliding gate operator
for gates up to 600 kg and 8 m width



- ▶ virtually maintenance free operator
- ▶ 24 V technology with controlled soft run
- ▶ many applications on the control board

SOMMER
eco
< 0,5 W STANDBY


Benefits:

- ▶ also apt for the high demands of industrial door applications
- ▶ fully automated force learning, therefore highest safety
- ▶ automatic detection of safety edges (8,2 kOhm or OSE) and light barriers (2 and 4 wire)
- ▶ pre-warning function and dead man operation
- ▶ selector switch for gate run DIN left/DIN right; no reconnection of motor and limit switches necessary
- ▶ automatic/semi automatic closing is possible from the end position and partial-opening position; partial opening position is adjustable
- ▶ frequency-modulated and secure radio by SOMMER
- ▶ economical energy consumption due to a toroidal core transformer
- ▶ UV-resistant and weather-resistant synthetic housing (IP 55)
- ▶ compatible with the SOMMER battery back-up system*



"RUNner" single operator (item no. 3520V000)

incl. 1 x sliding gate operator,
control unit STB-1, integrated radio
receiver (FM 868.8 MHz)

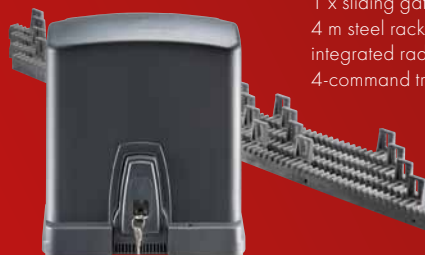

"RUNner" complete set (item no. 3521V000)

1 x sliding gate operator, control unit STB-1,
4 m steel rack bonded with plastic,
integrated radio receiver (FM 868.8 MHz),
4-command transmitter (item no. 4020V000)

Last updated: 10/2013. Literal errors, errors and technical changes excepted.

* available as accessory

Visit our homepage: www.sommer.eu

SOMMER Antriebs- und Funktechnik GmbH
Hans-Boeckler-Str. 21 - 27 • D-73230 Kirchheim/Teck
phone: +49 (0) 70 21 / 80 01-0
fax: +49 (0) 70 21 / 80 01-101
e-mail: info@sommer.eu

